AZECA®

Stereo* Bluetooth® *Transceiver

Owner's Manual

Bluetooth®

Model BTT009

Thank you for choosing the Azeca Bluetooth® *Transceiver Model BTT009. Please read the user's manual carefully before use.*

Features

- Play smartphone music through your home stereo
- Add stereo *Bluetooth*® to any device with a headphone jack
- Easily switch between receiving and transmitting
- Convert non-wireless devices to *Bluetooth*
- Compatible with all *Bluetooth* smartphones and tablets
- USB rechargeable with 10 hour play time
- Velcro backing for attaching to various devices
- Automatically pairs with last paired device
- Charge and listen at the same time
- 30 foot range
- *Bluetooth* profile (V2.1): A2DP

Includes

- Stereo *Bluetooth* transceiver
- USB charging cable
- Line-in cable
- Dual RCA jack adapter
- Jumper cable
- Two Velcro squares
- User's manual

AZECA

Note:
Even though the paired device and this transceiver support the same *Bluetooth* profiles, functions may vary due to specification differences of the paired devices.

• **Disclaimer**
To pair a device to this transceiver the device must support the A2DP *Bluetooth* profile. Attaching this transceiver to a phone, music player, or computer as a transmitter in TX mode, requires a 3.5 mm stereo headphone jack.

Using the Transmitter
Overview
Getting started

Before use

About BTT009

BTT009 is a *Bluetooth* transmitter and receiver. When it is used as a *Bluetooth* transmitter (TX), it can be connected to your portable music player or PC to wirelessly transmit music to a *Bluetooth* stereo receiver that uses the A2DP *Bluetooth* profile (Such as *Bluetooth* stereo headset or *Bluetooth* stereo speaker). When it is used as a *Bluetooth* receiver (RX), it can be connected to your home stereo receiver for wirelessly playing music from your *Bluetooth* smartphone or tablet.

AZECA

Overview

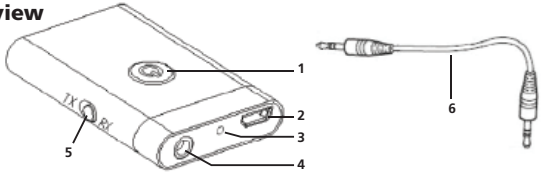

1	Multi-function button (MFB): Switching on/off, pairing	**4**	3.5mm audio jack
2	Charging jack	**5**	TX/RX switch
3	LED indicator	**6**	3.5mm to 3.5mm audio cable

1. Charging BTT009

The BTT009 comes with a built-in rechargeable battery, prior to using it, it is recommended to charge the battery fully for the first time. The LED flashes red when the BTT009 is at low power.

Connect the USB charging cable to an available standard UPS port on a computer or use a USB wall charger. Connect the micro USB end into the charging jack of the BTT009. A red LED is on while charging. It takes about 3 hours to charge the battery fully. When charging is completed, red LED will turn off.

Transmit (TX) Mode

Selecting mode: Please turn the TX/RX switch to TX mode before switching on BTT009.
Note: TX or RX mode cannot be changed after switching on BTT009.

1. Switching on/off the transmitter

FUNCTION	OPERATION	LED indicator
Switching on transmitter	Press ⏻ button for 3-4 seconds	Blue LED is on for 1 second
Switching off transmitter	Press ⏻ button for 3-4 seconds	Red LED is on for 1 second and then off

AZECA

2. Pairing with *Bluetooth* devices

Connected the BTT009 using the provided jumper cable to a non-wireless device such as an MP3 music player, tablet, PC. Confirm that the receiver device that you are pairing with supports the Bluetooth A2DP profile.

The pairing steps are as follows:

1) Make sure the transmitter is off, otherwise switch it off;
2) Keep the transmitter and your *Bluetooth* stereo receiver within 3 feet (the closer the better).
3) Switch on your *Bluetooth* stereo receiver and enter pairing mode;
4) Press and hold the MFB button of the transmitter for 5 to 7 seconds and do not release it until the blue LEDs flash rapidly.
5) The transmitter will automatically search for *Bluetooth* stereo receiver and finish connecting.
6) After successfully connecting, the blue LED of the transmitter will flash twice every 4 seconds;
7) Connect the transmitter to your music player through 3.5mm audio jack to play music.

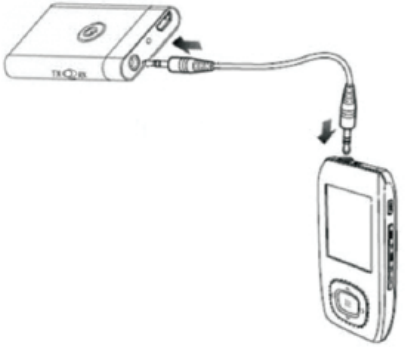

AZECA

Note:

- The pairing mode will last 2 minutes. The transmitter will enter standby mode if no devices can be connected within 2 minutes.
- The transmitter can pair with a *Bluetooth* stereo receiver whose PIN NO.. is "0000", "1234"or "1111", "8888".

3. Reconnecting to a *Bluetooth* device

1) Automatic connecting

Every time the transmitter is switched on, it will automatically connect to last connected device.

2) Manual connecting

When the transmitter is in standby mode and doesn't connect to any devices, short press ⏻ button once, it will automatically connected to last connected device.

4. Auto-off

The transmitter will automatically switch off if no devices can be connected within 5 minutes.

5. Clearing pairing list

Make sure the transmitter is off, press and hold ⏻ button for about 10 seconds. Do not release it until the red LED is on for 1 second and then blue LED is on for 1 second.

6. LED indicator

LED Indicator	STATUS OF THE TRANSMITTER
Blue LED flashes Continuously	Pairing mode
Blue LED flashes once every 1 second	Standby mode and not connected to a device
Blue LED flashes once every 4 seconds	Connected to a device
Red LED flashes	Low POWER

AZECA

RX Mode

Selecting mode: Please turn the TX/RX switch to RX mode before switching on BTT009.
Note: TX or RX mode cannot be changed after switching on BTT009.

1. Switching on/off the receiver

FUNCTION	OPERATION	LED INDICATOR
Switching on Receiver	Press ⏻ Button for 3-4 Seconds	Blue LED is on for 1 Second
Switching off Receiver	Press ⏻ Button for 3-4 Seconds	Red LED is on for 1 Second and then off

2. Pairing with Bluetooth devices
How to enter pairing mode

FUNCTION	OPERATION
Entering Pairing Mode	Make Sure the Receiver is off, Press and Hold ⏻ Button for about 5 - 7 Seconds, and do not release it Until Red and Blue LEDs Flashes Alternately

Note:
Pairing mode will last 2 minutes. The receiver will automatically switch to standby mode if no devices can be connected within 2 minutes.

AZECA

Pairing with a *Bluetooth* smartphone

Please make sure your cell phone is *Bluetooth*-enabled. Specific pairing steps may vary with different models of cell phones. Please refer to your cell phone's user's manual for additional information. The general pairing steps are as follows:

1) Keep the receiver and *Bluetooth* cell phone within 3 feet when pairing;
2) Enter the receiver's pairing mode by holding the MFB down for 5 to 7 seconds. The LED will flash alternating red/blue.
3) Active your cell phone's *Bluetooth* function and set your cell phone to search for *Bluetooth* devices within range. After the search is completed, select "BTT009" from the list of devices shown;
4) According to the indication, enter password or PIN No:"0000";
5) If prompted by your cell phone to connect, select "Yes";
6) After successful connecting, blue LED of the receiver will flash twice every 4 seconds.

Note:

- If pairing fails, please switch off the receiver and re-pair according to steps 1～6 mentioned above.

- Once pairing is successful, the receiver and will remember the last paired device and will auto-pair the next time. The receiver can remember 8 paired devices, when the number of paired devices exceeds 8, the first device will be replaced.

- Every time the receiver is switched on, it will connect to the last connected device automatically. If you want to pair it to different previously paired device, please turn off the current device's *Bluetooth* function first and then try to pair the receiver to the new device according to steps 1～6 mentioned above.

AZECA

3. Play smartphone music on various devices.
When the BTT009 is used as a receiver, you can connect it to a home stereo receiver, non-wireless speaker, or a car sound system auxiliary line-in jack. Use the included dual RCA Y adapter and 3.5mm stereo audio cable to attach the BTT009 to various devices. Use the On some devices the MFB allows pause/un-pause of music playing. This feature is not compatible with all devices.

FUNCTION	STATUS OF THE RECEIVER	FUNCTION
PAUSE	Playing Music	Short press ⏻ button once
PLAY	Pausing	Short press ⏻ button once

4. Reconnecting to a *Bluetooth* device

1) Automatic connecting
Every time the transmitter is switched on, it will automatically connect to last connected device.

2) Manual connecting
When the receiver is in standby mode and doesn't connect to any devices, short press ⏻ button once, it will automatically connected to last connected device.

5. Auto-off
The receiver will automatically switch off if no devices can be connected within 5 minutes.

6. Clearing pairing list
Make sure the receiver is off, press and hold ⏻ button for about 10 seconds, and don't release it until red LED is on for 1 second and then blue LED is on for 1 second.

AZECA

7. LED indicator

LED Indicator	STATUS OF THE RECEIVER
Red and Blue LEDs flash Alternately	Pairing mode
Blue LED flashes once every 1 second	Standby mode and not connected to a device
Blue LED flashes once every 4 seconds	Connected to a device
Red LED flashes	Low POWER

Care and maintenance

- Do not expose the transceiver to liquid, moisture or humidity.
- Do not use abrasive cleaning solvents to clean the transceiver.
- Do not expose the transceiver to extremely high or low temperatures.
- Do not dispose of the transceiver in a fire.
- Do not drop or exert excessive force on the transceiver as you may damage the internal circuit.
- Do not attempt to disassemble the transceiver as it will void the warranty.

Troubleshooting

My transceiver will not turn on

- The batteries are low and needs to be recharged.

The sound is cutting out

- The average operating distance for this Class II device is 33 feet (10 meters). Interior walls, wireless routers, and cordless phones can reduce this operating distance.

AZECA

I cannot pair the transceiver with a device.

- This transceiver will only work with devices that support the following *Bluetooth* profiles: A2DP.

I still cannot get my transceiver to work

- Call our Help Desk at 1(888) 992-4639

Specifications	
Bluetooth version	*Bluetooth* V2.1
Bluetooth profiles	A2DP and AVRCP
Frequency range	2.402 GHz - 2.480 GHz
Operating Distance	Up to 10 meters
Charging input voltage	DC 5V
Working time	TX: Up to 10 hours RX: Up to 6 hours
Charging time	About 3 hours
Dimensions	51.4 x 34.7 x 8.6mm
Weight	48.5g

AZECA

FCC Part 15
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Warning
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canada ICES-003 statement
This Class B digital apparatus complies with Canadian ICES-003.

European Union Directives Conformance Statement
Azeca Corp declares that this product is in compliance with:

- The key requirements and relevant provisions of Directive 1999/5/EC
- All other key EU Directives

AZECA

LIMITED WARRANTY

Azeca Corp ("Azeca") warrants that (a) its Stereo Bluetooth Transceiver (Model BTT009) will perform substantially in accordance with the accompanying written materials for a period of 6 months from the date of receipt and (b) that Model BTT009 (product) will be free from defects in materials and workmanship under normal use and service for a period of 6 months. In the event applicable law imposes any implied warranties, the implied warranty period is limited to (180) days from the date of receipt. Some jurisdictions do not allow such limitations on duration of an implied warranty, so the above limitation may not apply. Azeca Corp and its suppliers' entire liability and Customer's exclusive remedy shall be, at Azeca Corp's option, either (a) repair, or (b) replacement of the product that does not meet this Limited Warranty and which is returned to the Azeca Corp with a copy of Customer's receipt. This Limited Warranty is void if failure of the product has resulted from accident, abuse, disassembly, or misapplication. Any replacement product will be warranted for the remainder of the original warranty period or thirty (30) days, whichever is longer. This warranty is valid only to the original purchaser of the product in the United States.

TO OBTAIN TECHNICAL SUPPORT OR RETURN INFORMATION

Contact our support team at 1(888) 992-4639
Or email us at support@azeca.com

TO OBTAIN WARRANTY SERVICE

If you purchased the product from a retailer or web retailer and you are returning the product within their return policy period, return the product with original receipt to the retailer or web retailer.

If you are outside the retailers return policy, contact the Azeca support center to receive a Return Authorization number and return address. Returned packages will not be accepted without a Return Authorization number.

THIS WARRANTY DOES NOT COVER:

Normal wear and tear, damage from accidents, negligence, misuse, abuse, acts of God, commercial use, modifications, attempts to repair, connection to an incorrect voltage supply, or cosmetic damage. This warranty also does not cover product sold refurbished or with all faults.

WARRANTY LIMITATIONS

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AZECA CORP AND ITS SUPPLIERS DISCLAIM ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WITH REGARD TO THE PRODUCT AND ANY RELATED WRITTEN MATERIALS. THIS LIMITED WARRANTY GIVES CUSTOMER SPECIFIC LEGAL RIGHTS. CUSTOMER MAY HAVE OTHER RIGHTS DEPENDING ON THE JURISDICTION.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL AZECA CORP OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING WITHOUT LIMITATION, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR INDIRECT DAMAGES FOR PERSONAL INJURY, LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THIS PRODUCT, EVEN IF AZECA CORP HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN ANY CASE, AZECA CORP AND ITS SUPPLIERS' ENTIRE LIABILITY UNDER ANY PROVISION OF THIS AGREEMENT SHALL BE LIMITED TO THE AMOUNT ACTUALLY PAID BY YOU FOR THE PRODUCT. BECAUSE SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

Contact Azeca Corp:
For customer service please call: 1-800-934-9839
www.azeca.com

Distributed by:
Azeca Corp, 5400 Laurel Springs Pkwy, Suite 1307, Suwanee GA 30024 USA
Copyright © Azeca Corp. All rights reserved. Made in China

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Azeca Corp is under license. Other trademarks and trade names are those of their respective owners.

Other Products by Azeca

Stereo *Bluetooth* Speaker

Play music from your Smartphone or MP3 player

- Answer, redial or mute calls
- Built-in mic for hands-free communication
- Easy-to-reach controls for volume, next/previous track and pause
- Automatically pairs with last Bluetooth device
- Use battery or AC power
- 30 foot range

Retractable Bluetooth Headset with Vibration

Earbud retracts instantly

- Answer, redial, or made voice calls
- Vibrates when a call is received
- Clip-on or hang around neck
- Includes charging cable and case

Portable Bluetooth Mini Speaker

Rechargeable with Line-in jack

- Speaker pops-up for improved bass
- Independent volume control
- Up to 10 hours working time
- Only 1.9 inches tall when collapsed
- Includes carry bag and line-in cable

Stereo *Bluetooth* Folding Headset

Play music from your Smartphone or MP3 player

- Answer, redial, mute, or make voice calls
- Extra lightweight – just 1.4 ounces
- Ear fitting, comfortable design
- Easy-to-reach controls
- Folds easily into portable travel case

Visit www.Azeca.com for more information or call customer service at 1(800) 934-9839